
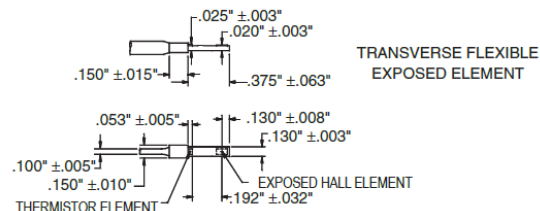



Gaussmeter probes 7000 series

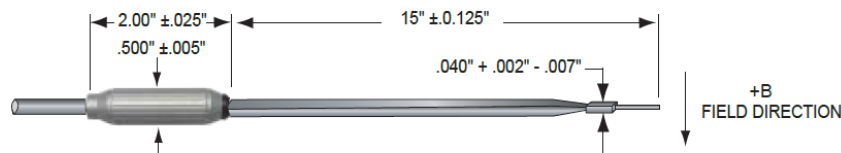

Transverse Flexible Probes

Transverse flexible specifications


Model	A	B	Stem	Linearity	Frequency	Sensitivity	Active area
FTF71-0215-05-T	15"	.040" ± .005"	Flexible stem exposed device	.25% - 30 kG	DC to 20 kHz	1X	.070" dia.
FTM71-0215-30	15"	.040" ± .005"	Flexible stem exposed device	.15% - 30 kG	DC to 400 kHz	10X	.040" dia.
FTM71-0215-05-T	15"	.040" ± .005"	Flexible stem exposed device	.15% - 30 kG	DC to 400 kHz	10X	.040" dia.

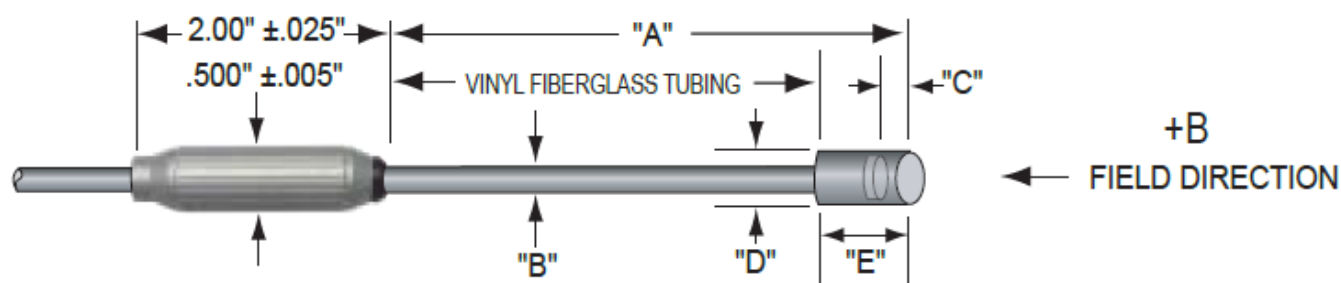

Axial flexible specifications

Model	A	B	C	Stem	Linearity	Frequency	Sensitivity	Active area
FAM71-1815-30	15"	.10" ± .005"	0.015"	Aluminum	.15% - 30 kG	DC to 400 kHz	10X	.030" dia.

Gaussmeter probes 7000 series

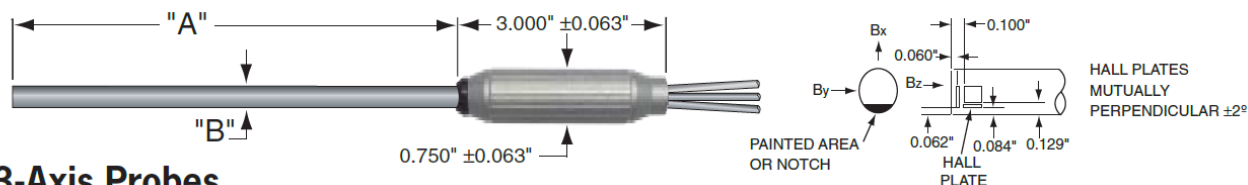


Standard 3-Axis Probes

Standard 3-axis specifications

Model	A	B	Stem	Linearity	Frequency	Sensitivity	Active area
ZOA73-3208-05	8"	.312" ± .005"	Aluminum	.25% - 10 kG	DC to 400 kHz	1X	.060" dia.
ZOA73-3208-05-T	8"	.312" ± .005"	Aluminum	.25% - 10 kG	DC to 400 kHz	1X	.060" dia.
ZOA73-3208-15-T	8"	.312" ± .005"	Aluminum	.25% - 10 kG	DC to 400 kHz	1X	.060" dia.
ZOA73-3208-30	8"	.312" ± .005"	Aluminum	.25% - 10 kG	DC to 400 kHz	1X	.060" dia.
ZOA73-3208-30-T	8"	.312" ± .005"	Aluminum	.25% - 10 kG	DC to 400 kHz	1X	.060" dia.

Magnaprobes

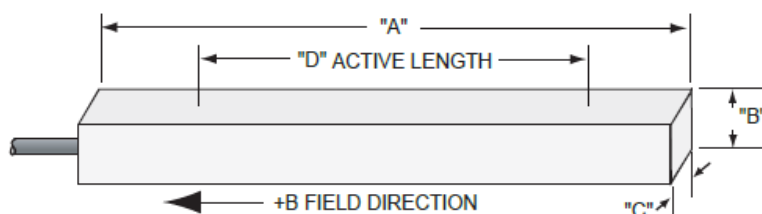

Magnaprobe specifications

Model	A	B	C	Stem	Linearity	Frequency	Sensitivity	Active area
MOX71-2506-05	9"	.48" ± .03"	0.250"	Lexan	.5% - 2 G	DC to 400 kHz	.01X	1.5" dia.
MOX71-2506-15	9"	.48" ± .03"	0.250"	Lexan	.5% - 2 G	DC to 400 kHz	.01X	1.5" dia.